


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 16 TOWNSHIP 17 RANGE 3
DATE: 6-8-03
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 7-10-02

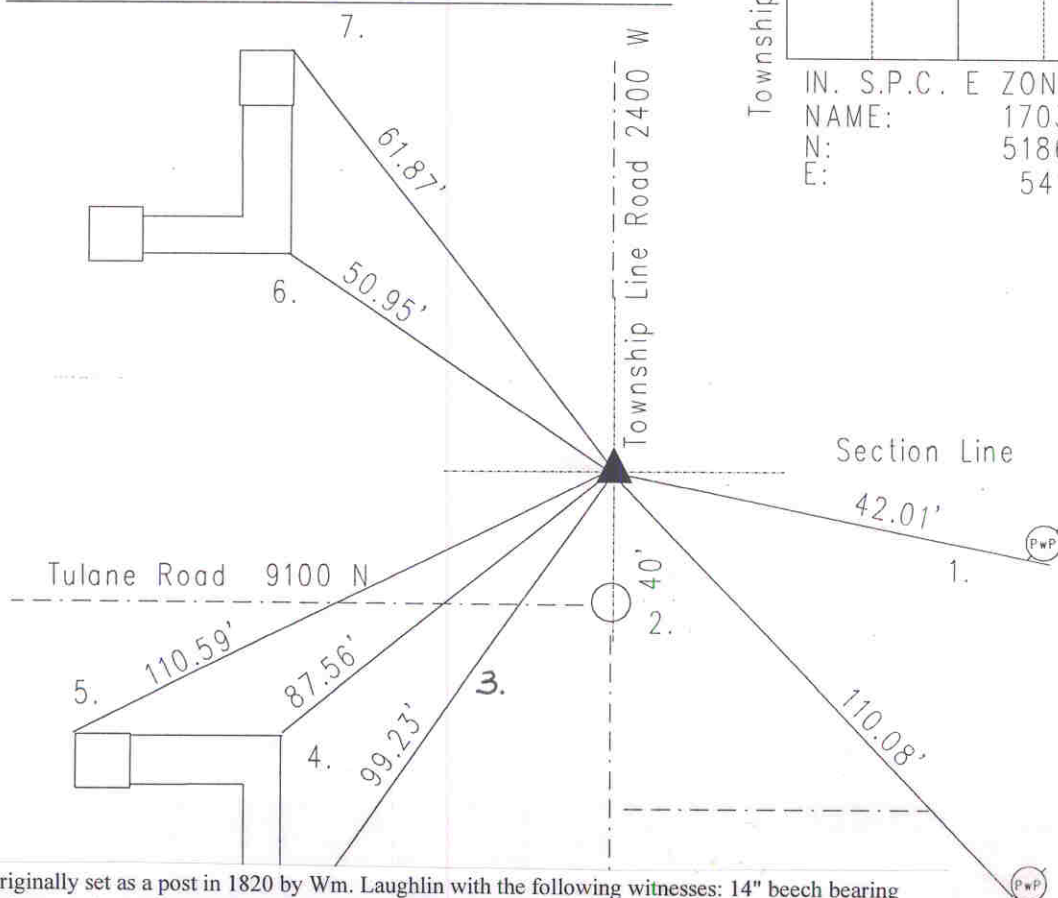

Township Line Road 2400 W

Section Line 9100 N

IN. S.P.C. E ZONE NAD '83
NAME: 17031604
N: 518694.2790(m)
E: 54142.8000(m)

Corner originally set as a post in 1820 by Wm. Laughlin with the following witnesses: 14" beech bearing north 55 degrees, thence west 30 links, and a 8" sugar bearing south 7 degrees, thence west 11 links. (M.C. Atlas p. 8) A survey by D.B. Hasbrook on August 20, 1852 indicates no stone but the following witnesses: 10" Beech bearing north 41.75 degrees, thence east 55 links; and a 30" oak bearing south 43 degrees, thence west 133 links. (Washington Legal Book p.3) Corner referenced by Gioscio on 12/5/49 and called a stone. Corner referenced by Cripe on 12/18/73 and called a R.R. spike. Corner referenced by Miller on 2/4/76 and called a R.R. spike. Corner referenced by Greene on 3/17/87 and called a R.R. spike. Corner referenced by Wilcoxon on 4/14/97 and called a R.R. spike. Corner referenced by Wilcoxon on 7/10/2002 and called a R.R. spike. Corner was excavated on 5/21/2003 by Kiste and a R.R. spike was found 4" down. A stone was found 19" down. A #205 cast iron Harrison Monument was set in position as the corner.

17031604

REF.	DISTANCE	DESCRIPTION
1.	42.01'	PK nail S PwP#50-61A 12" up
	110.08'	Mag nail w/brass washer W PwP#453-201 A
2.	40.00'	Due S to C/L of Tulane Road
3.	99.23'	SE corner of brick wall
4.	87.48'	NE corner of brick wall
5.	110.47'	NW corner of brick wall
6.	50.95'	SE corner of brick wall
7.	61.87'	NE corner of brick wall